


W1 package: 1200V 10A IGBT PIM module

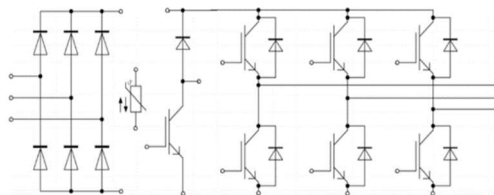

Equivalent Circuit Schematic

Features:

- 1200V 10A, $V_{CE(sat)} = 1.85V$
- High RBSOA capability
- High speed trench field-stop IGBT
- Low turn-off losses
- High short circuit capability

产品特性:

- 1200V 10A, $V_{CE(sat)} = 1.85V$
- 高 RBSOA 性能
- 沟槽栅场截止型 IGBT 芯片
- 低关断损耗
- 高短路耐量

Typical Applications:

- Motor Drives
- Air Conditioning
- Auxiliary Inverters

典型应用:

- 马达驱动
- 空调
- 辅助逆变器

IGBT, Inverter / IGBT, 逆变部分

Maximum Rated Values / 最大标称参数

Collector-emitter Voltage 集电极-发射极电压	$T_{vj}=25^{\circ}\text{C}$	V_{CES}	1200	V
Continuous DC collector current 集电极连续直流电流		$I_{C\text{ nom}}$	10	A
	$T_C=80^{\circ}\text{C}, T_{vj\text{ max}}=150^{\circ}\text{C}$	I_C	18	A
Repetitive Peak collector current 集电极可重复峰值电流	$I_{CRM}=2\times I_{C\text{ nom}}$	I_{CRM}	20	A
Total power dissipation 总功率损耗	$T_C=25^{\circ}\text{C}, T_{vj\text{ max}}=150^{\circ}\text{C}$	P_{tot}	100	W
Gate-emitter peak voltage 门极-发射极峰值电压		V_{GES}	± 20	V

Characteristic Values / 性能参数

			min.	typ.	max.	
Collector-emitter saturation Voltage 集电极-发射极饱和压降	$I_C=10\text{A}, V_{GE}=15\text{V}$ $I_C=10\text{A}, V_{GE}=15\text{V}$ $I_C=10\text{A}, V_{GE}=15\text{V}$	$T_{vj}=25^{\circ}\text{C}$ $T_{vj}=125^{\circ}\text{C}$ $T_{vj}=150^{\circ}\text{C}$	V_{CESat}	1.85 2.20 2.20	2.10	V
Gate Threshold Voltage 门极阈值电压	$V_{CE}=V_{GE}, I_C=1\text{mA},$ $T_{vj}=25^{\circ}\text{C}$		V_{GEth}	4.50	5.80	6.50 V
Gate Charge 门极电荷	$V_{CC}=600\text{V}, V_{GE}=15\text{V},$ $I_C=10\text{A},$ $T_{vj}=25^{\circ}\text{C}$		Q_G	60		nC
Input Capacitance 输入电容	$V_{CE}=25\text{V}, V_{GE}=0\text{V}$ $f=1\text{MHz}$		C_{ies}	0.86		nF
Reverse Transfer Capacitance 反向传输电容			C_{res}	0.02		nF
Collector-emitter Cutoff Current 集电极-发射极关断漏电流	$V_{CE}=1200\text{V}, V_{GE}=0\text{V},$ $T_{vj}=25^{\circ}\text{C}$		I_{CES}		1	mA
Gate-emitter Leakage Current 门极-发射极漏电流	$V_{CE}=0\text{V}, V_{GE}=\pm 20\text{V},$ $T_{vj}=25^{\circ}\text{C}$		I_{GES}		± 200	nA
Turn-on Delay Time, Inductive Load 开通延迟时间, 感性负载	$I_C=10\text{A}, V_{CE}=600\text{V}$ $V_{GE}=\pm 15\text{V}$ $R_{Gon}=30\Omega$	$T_{vj}=25^{\circ}\text{C}$ $T_{vj}=125^{\circ}\text{C}$ $T_{vj}=150^{\circ}\text{C}$	t_{don}	5 5 5		ns
Rise Time, Inductive Load 上升时间, 感性负载	$I_C=10\text{A}, V_{CE}=600\text{V}$ $V_{GE}=\pm 15\text{V}$ $R_{Gon}=30\Omega$	$T_{vj}=25^{\circ}\text{C}$ $T_{vj}=125^{\circ}\text{C}$ $T_{vj}=150^{\circ}\text{C}$	t_r	20 21 21		ns
Turn-off Delay Time, Inductive Load 关断延迟时间, 感性负载	$I_C=10\text{A}, V_{CE}=600\text{V}$ $V_{GE}=\pm 15\text{V}$ $R_{Goff}=30\Omega$	$T_{vj}=25^{\circ}\text{C}$ $T_{vj}=125^{\circ}\text{C}$ $T_{vj}=150^{\circ}\text{C}$	t_{doff}	90 90 100		ns
Fall Time, Inductive Load 下降时间, 感性负载	$I_C=10\text{A}, V_{CE}=600\text{V}$ $V_{GE}=\pm 15\text{V}$ $R_{Goff}=30\Omega$	$T_{vj}=25^{\circ}\text{C}$ $T_{vj}=125^{\circ}\text{C}$ $T_{vj}=150^{\circ}\text{C}$	t_f	120 350 365		ns
Turn-on energy loss per pulse 开通损耗	$I_C=10\text{A}, V_{CE}=600\text{V},$ $L_o=80\text{nH}, V_{GE}=\pm 15\text{V}$ $V_{GE}=\pm 15\text{V}, R_{Gon}=30\Omega$	$T_{vj}=25^{\circ}\text{C}$ $T_{vj}=125^{\circ}\text{C}$ $T_{vj}=150^{\circ}\text{C}$	E_{on}	1.10 1.50 1.70		mJ
Turn-off energy loss per pulse 关断损耗	$I_C=10\text{A}, V_{CE}=600\text{V},$ $L_o=80\text{nH}, V_{GE}=\pm 15\text{V}$ $V_{GE}=\pm 15\text{V}, R_{Goff}=30\Omega$	$T_{vj}=25^{\circ}\text{C}$ $T_{vj}=125^{\circ}\text{C}$ $T_{vj}=150^{\circ}\text{C}$	E_{off}	0.30 0.60 0.70		mJ

Thermal Resistance, Junction to Case 结-壳热阻	Per IGBT/单个 IGBT	R_{thJC}		0.94	1.22	K/W
Temperature under switching conditions 工作温度		$T_{vj\ op}$	-40		150	°C

Diode, Inverter / 二极管，逆变部分

Maximum Rated Values / 最大标称参数

Repetitive peak reverse voltage 可重复反向峰值电压	$T_{vj}=25^{\circ}\text{C}$	V_{RRM}	1200	V
Continuous DC Forward Current 可连续正向直流电流		I_F	10	A
Repetitive Peak Forward Current 可重复正向峰值电流	$I_{CRM}=2\times I_{Fnom}$	I_{FRM}	20	A

Characteristic Values / 性能参数

			min.	typ.	max.	
Forward Voltage 正向通态压降	$I_F=10\text{A}, V_{GE}=0\text{V}$ $I_F=10\text{A}, V_{GE}=0\text{V}$ $I_F=10\text{A}, V_{GE}=0\text{V}$	$T_{vj}=25^{\circ}\text{C}$ $T_{vj}=125^{\circ}\text{C}$ $T_{vj}=150^{\circ}\text{C}$	V_F	1.70 1.70 1.65	2.20	V
Peak Reverse Recovery Current 反向恢复峰值电流	$I_F=10\text{A}, V_R=600\text{V}$ $-di_F/dt=150\text{A}/\mu\text{s}$ $V_{GE}=-15\text{V}$	$T_{vj}=25^{\circ}\text{C}$ $T_{vj}=125^{\circ}\text{C}$ $T_{vj}=150^{\circ}\text{C}$	I_{RM}	9 12 13		A
Recovery Charge 反向恢复电荷	$I_F=10\text{A}, V_R=600\text{V}$ $-di_F/dt=150\text{A}/\mu\text{s}$ $V_{GE}=-15\text{V}$	$T_{vj}=25^{\circ}\text{C}$ $T_{vj}=125^{\circ}\text{C}$ $T_{vj}=150^{\circ}\text{C}$	Q_R	0.80 1.60 1.80		μC
Reverse Recovery Energy 反向恢复损耗	$I_F=10\text{A}, V_R=600\text{V}$ $-di_F/dt=150\text{A}/\mu\text{s}$ $V_{GE}=-15\text{V}$	$T_{vj}=25^{\circ}\text{C}$ $T_{vj}=125^{\circ}\text{C}$ $T_{vj}=150^{\circ}\text{C}$	E_{rec}	0.20 0.30 0.40		mJ
Thermal Resistance, Junction to Case 结-壳热阻	Per Diode / 单个 Diode	R_{thJC}		1.80		K/W
Temperature under switching conditions 工作温度		$T_{vj\ op}$	-40		150	°C

Diode, Rectifier / 二极管，整流部分

Maximum Rated Values / 最大标称参数

Repetitive peak reverse voltage 可重复反向峰值电压	$T_{vj}=25^{\circ}\text{C}$	V_{RRM}	1600	V
Maximum RMS Forward Current Per Chip 单芯片最大正向电流有效值		I_{FRMSM}	15	A
Surge Forward Current 正向浪涌电流	$t_p=10\text{ms}, \sin 180^{\circ}, T_{vj}=25^{\circ}\text{C}$	I_{FSM}	220	A
I^2t Value I^2t 值	$t_p=10\text{ms}, \sin 180^{\circ}, T_{vj}=25^{\circ}\text{C}$	I^2t	242	A^2s

Characteristic Values / 性能参数

			min.	typ.	max.	
Forward Voltage 正向通态压降	$I_F=10A$, $T_{vj}=25^{\circ}C$ $I_F=10A$, $T_{vj}=125^{\circ}C$ $I_F=10A$, $T_{vj}=150^{\circ}C$	V_F		1.00 0.95 0.90		V
Reverse Current 反向漏电流	$T_{vj}=25^{\circ}C$, $V_{RRM}=1800V$	I_{RM}			1	mA
Thermal Resistance, Junction to Case 结-壳热阻		R_{thJC}		1.75		K/W
Temperature under switching conditions 工作温度		$T_{vj\ op}$	-40		150	$^{\circ}C$

IGBT, Brake-Choppe / IGBT 制动-斩波器
Maximum Rated Values / 最大标称参数

Collector-emitter Voltage 集电极-发射极电压	$T_{vj}=25^{\circ}C$	V_{CES}	1200	V
Continuous DC collector current 集电极连续直流电流		$I_{C\ nom}$	10	A
	$T_C=80^{\circ}C$, $T_{vjmax}=150^{\circ}C$	I_C	18	A
Repetitive Peak collector current 集电极可重复峰值电流	$I_{CRM}=2 \times I_{Cnom}$	I_{CRM}	20	A
Total power dissipation 总功率损耗	$T_C=25^{\circ}C$, $T_{vjmax}=150^{\circ}C$	P_{tot}	100	W
Gate-emitter peak voltage 门极-发射极峰值电压		V_{GES}	± 20	V

Characteristic Values / 性能参数

			min.	typ.	max.	
Collector-emitter saturation Voltage 集电极-发射极饱和压降	$I_C=10A$, $V_{GE}=15V$ $T_{vj}=25^{\circ}C$ $I_C=10A$, $V_{GE}=15V$ $T_{vj}=125^{\circ}C$ $I_C=10A$, $V_{GE}=15V$ $T_{vj}=150^{\circ}C$	V_{CESat}		1.85 2.20 2.20	2.10	V
Gate Threshold Voltage 门极阈值电压	$V_{CE}=V_{GE}$, $I_C=1mA$, $T_{vj}=25^{\circ}C$	V_{GETh}	4.50	5.80	6.50	V
Gate Charge 门极电荷	$V_{CC}=600V$, $V_{GE}=15V$, $I_C=10A$, $T_{vj}=25^{\circ}C$	Q_G		60		nC
Input Capacitance 输入电容	$V_{CE}=25V$, $V_{GE}=0V$ $f=1MHz$	C_{ies}		0.86		nF
Reverse Transfer Capacitance 反向传输电容		C_{res}		0.01		nF
Collector-emitter Cutoff Current 集电极-发射极关断漏电流	$V_{CE}=1200V$, $V_{GE}=0V$, $T_{vj}=25^{\circ}C$	I_{CES}			1	mA
Gate-emitter Leakage Current 门极-发射极漏电流	$V_{CE}=0V$, $V_{GE}=\pm 20V$, $T_{vj}=25^{\circ}C$	I_{GES}			± 200	nA
Turn-on Delay Time, Inductive Load 开通延迟时间, 感性负载	$I_C=10A$, $V_{CE}=600V$ $T_{vj}=25^{\circ}C$ $V_{GE}=\pm 15V$ $T_{vj}=125^{\circ}C$ $R_{Gon}=30\Omega$ $T_{vj}=150^{\circ}C$	t_{don}		5 5 5		ns
Rise Time, Inductive Load 上升时间, 感性负载	$I_C=10A$, $V_{CE}=600V$ $T_{vj}=25^{\circ}C$ $V_{GE}=\pm 15V$ $T_{vj}=125^{\circ}C$ $R_{Gon}=30\Omega$ $T_{vj}=150^{\circ}C$	t_r		20 21 21		ns

Turn-off Delay Time, Inductive Load 关断延迟时间, 感性负载	$I_C=10A, V_{CE}=600V$ $V_{GE}=\pm 15V$ $R_{Goff}=30\Omega$	$T_{vj}=25^\circ C$ $T_{vj}=125^\circ C$ $T_{vj}=150^\circ C$	t_{doff}		90 90 100		ns
Fall Time, Inductive Load 下降时间, 感性负载	$I_C=10A, V_{CE}=600V$ $V_{GE}=\pm 15V$ $R_{Goff}=30\Omega$	$T_{vj}=25^\circ C$ $T_{vj}=125^\circ C$ $T_{vj}=150^\circ C$	t_f		120 350 365		ns
Turn-on energy loss per pulse 开通损耗	$I_C=10A, V_{CE}=600V, T_{vj}=25^\circ C$ $L_o=80nH, V_{GE}=\pm 15V, T_{vj}=125^\circ C$ $V_{GE}=\pm 15V, R_{Gon}=30\Omega, T_{vj}=150^\circ C$		E_{on}		1.10 1.50 1.70		mJ
Turn-off energy loss per pulse 关断损耗	$I_C=10A, V_{CE}=600V, T_{vj}=25^\circ C$ $L_o=80nH, V_{GE}=\pm 15V, T_{vj}=125^\circ C$ $V_{GE}=\pm 15V, R_{Goff}=30\Omega, T_{vj}=150^\circ C$		E_{off}		0.30 0.60 0.70		mJ
Thermal Resistance, Junction to Case 结-壳热阻	Per IGBT/单个 IGBT		R_{thJC}		0.94	1.22	K/W
Temperature under switching conditions 工作温度			$T_{vj op}$	-40		150	$^\circ C$

Diode, Brake-Chopper / 二极管, 制动-斩波器

Maximum Rated Values / 最大标称参数

Repetitive peak reverse voltage 可重复反向峰值电压	$T_{vj}=25^\circ C$	V_{RRM}	1200	V
Continuous DC Forward Current 可连续正向直流电流		I_F	10	A
Repetitive Peak Forward Current 可重复正向峰值电流	$I_{CRM}=2 \times I_{Fnom}$	I_{FRM}	20	A

Characteristic Values / 性能参数

			min.	typ.	max.	
Forward Voltage 正向通态压降	$I_F=10A, V_{GE}=0V$ $I_F=10A, V_{GE}=0V$ $I_F=10A, V_{GE}=0V$	$T_{vj}=25^\circ C$ $T_{vj}=125^\circ C$ $T_{vj}=150^\circ C$	V_F	1.70 1.70 1.65	2.20	V
Peak Reverse Recovery Current 反向恢复峰值电流	$I_F=10A, V_R=600V$ $-di_F/dt=150A/us$ $V_{GE}=-15V$	$T_{vj}=25^\circ C$ $T_{vj}=125^\circ C$ $T_{vj}=150^\circ C$	I_{RM}	9 12 13		A
Recovery Charge 反向恢复电荷	$I_F=10A, V_R=600V$ $-di_F/dt=150A/us$ $V_{GE}=-15V$	$T_{vj}=25^\circ C$ $T_{vj}=125^\circ C$ $T_{vj}=150^\circ C$	Q_R	0.80 1.60 1.80		μC
Reverse Recovery Energy 反向恢复损耗	$I_F=10A, V_R=600V$ $-di_F/dt=150A/us$ $V_{GE}=-15V$	$T_{vj}=25^\circ C$ $T_{vj}=125^\circ C$ $T_{vj}=150^\circ C$	E_{rec}	0.20 0.30 0.40		mJ
Thermal Resistance, Junction to Case 结-壳热阻	Per Diode / 单个 Diode		R_{thJC}	1.80		K/W
Temperature under switching conditions 工作温度			$T_{vj op}$	-40	150	$^\circ C$

NTC-Thermistor/ NTC-热敏电阻

Characteristic Values / 性能参数

			min.	typ.	max.	
Rated Resistance 标称电阻	$T_{vj}=25^{\circ}\text{C}$	R_{25}		5		$\text{K}\Omega$
Deviation of R100 R100 偏移值	$T_C=100^{\circ}\text{C}, R_{100}=481\Omega$	$\Delta R/R$	-5		5	%
Power Dissipation 功率耗散	$T_C=25^{\circ}\text{C}$	P_{25}		50		mW
B-Value B 值	$R_2=R_{25} \exp[B_{25/50}(1/T_2-1/(298.15\text{K}))]$	$B_{25/50}$		3380		K
B-Value B 值	$R_2=R_{25} \exp[B_{25/80}(1/T_2-1/(298.15\text{K}))]$	$B_{25/80}$		3440		K

Module / 模块

Isolation Test Voltage 绝缘测试电压	RMS, f=50Hz, t=1min	V_{ISOL}		2.5		KV
Internal Isolation 内部绝缘	基本绝缘 (class 1, IEC 61140) Basic insulation (class1, IEC 61140)			Al_2O_3		
Creepage Distance 爬电距离	端子-散热片 terminal to heatsink 端子-端子 terminal to terminal			11.5 6.3		mm
Clearance 电气间隙	端子-散热片 terminal to heatsink 端子-端子 terminal to terminal			10.0 5.5		mm
Comparative Tracking Index 相对漏电起痕指数		CTI		>200		


			min.	typ.	max.	
Stray Inductance Module 模块杂散电感		L_{sCE}		30		nH
Module Lead Resistance, Terminals-Chip 模块引脚电阻, 端子-芯片	$T_C=25^{\circ}\text{C}$, 每个开关 per switch	$R_{CC'+EE}$ $R_{AA'+CC}$		8.00 6.00		$\text{m}\Omega$
Storage Temperature 贮存温度		T_{stg}	-40		125	$^{\circ}\text{C}$
Mounting torque for modul mounting 模块安装的安装扭矩	M4	M	1.2		1.8	N-m
Weight 重量		G		24		g

输出特性 IGBT, 逆变器(典型值)

Output characteristic IGBT Inverter (typical)

$I_C = f(V_{CE})$,

$V_{GE} = 15V$

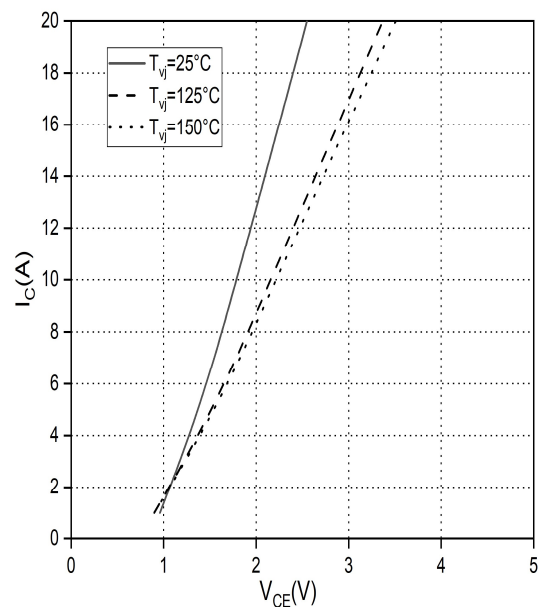


输出特性 IGBT, 逆变器(典型值)

output characteristic IGBT Inverter (typical)

$I_C = f(V_{CE})$,

$T_{vj} = 150^\circ C$

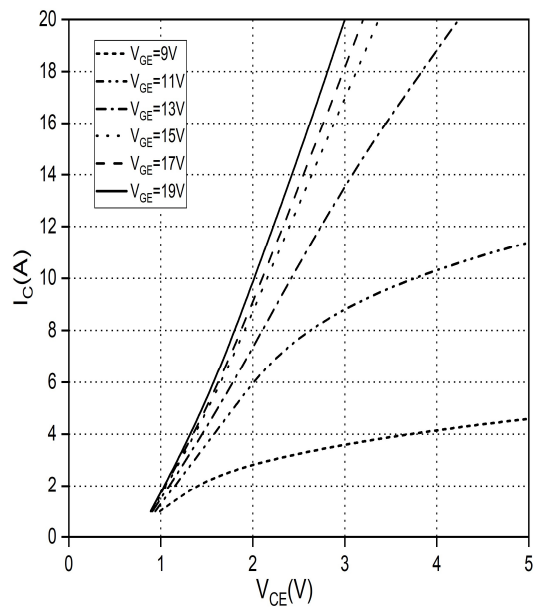


传输特性 IGBT, 逆变器 (典型值)

Transfer characteristic IGBT, Inverter (typical)

$I_C = f(V_{GE})$,

$V_{CE} = 20V$

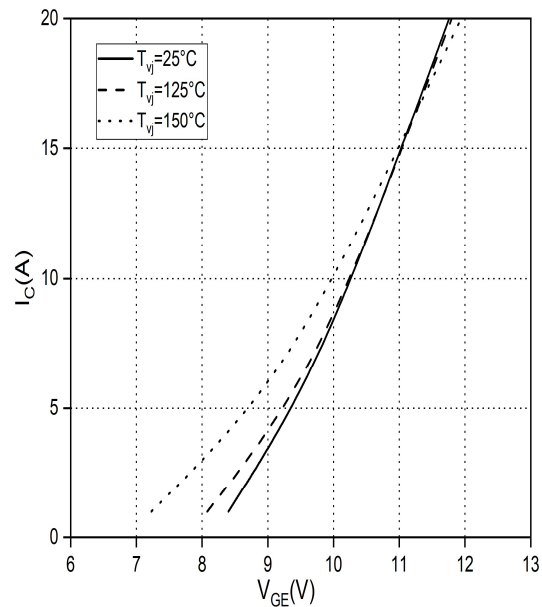


开关损耗 IGBT, 逆变器 (典型值)

switching losses IGBT, Inverter (typical)

$E_{on} = f(I_C), E_{off} = f(I_C), V_{GE} = \pm 15V$,


$R_{Gon} = 30\Omega, R_{Goff} = 30\Omega, V_{CE} = 600V$

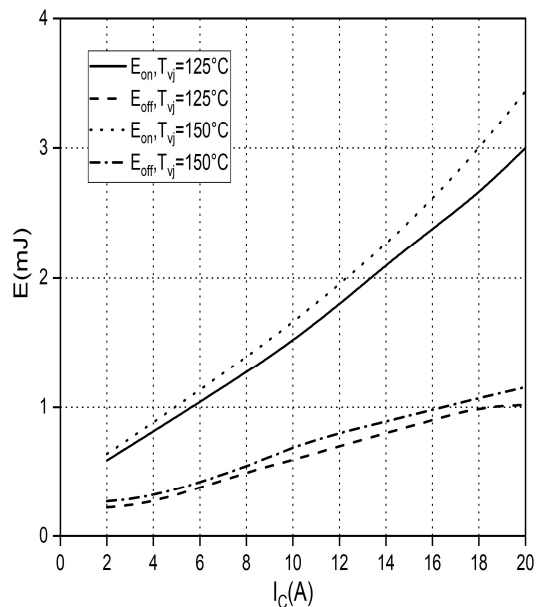

开关损耗 IGBT, 逆变器 (典型值)

Switching losses IGBT, Inverter (typical)


$V_{GE} = \pm 15V, I_C = 10A, V_{CE} = 600V$

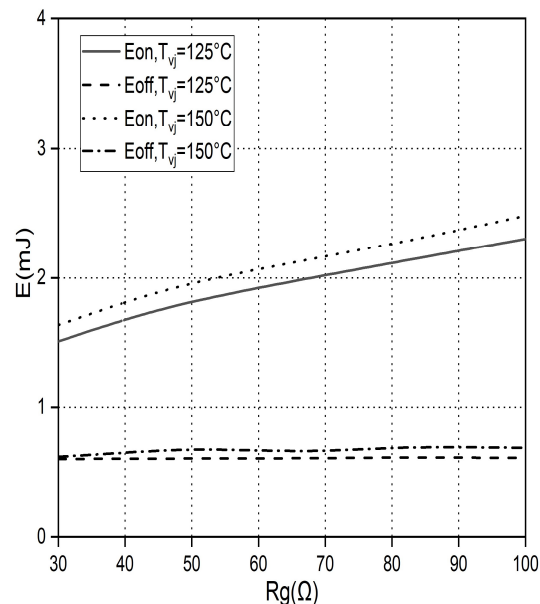

瞬态热阻抗 IGBT, 逆变器

transient thermal impedance IGBT, Inverter

$Z_{thJC} = f(t)$

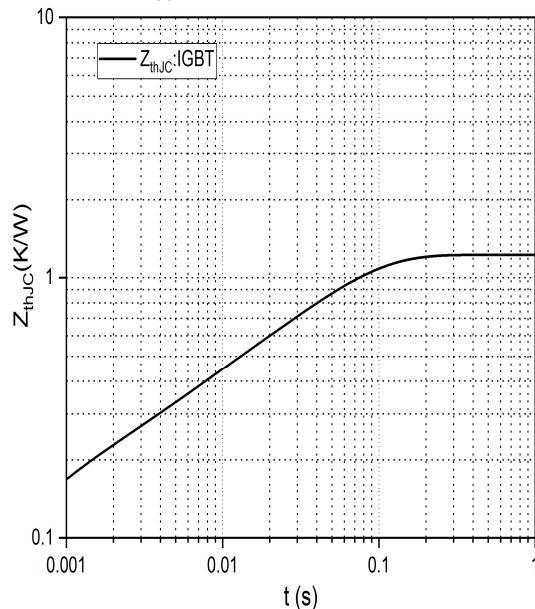


反偏安全工作区 IGBT, 逆变器(RBSOA)

Reverse bias safe operating area IGBT, Inverter

(RBSOA) $I_C = f(V_{CE})$


$V_{GE} = \pm 15V, R_{Goff} = 30\Omega, T_{vj} = 150^\circ C$

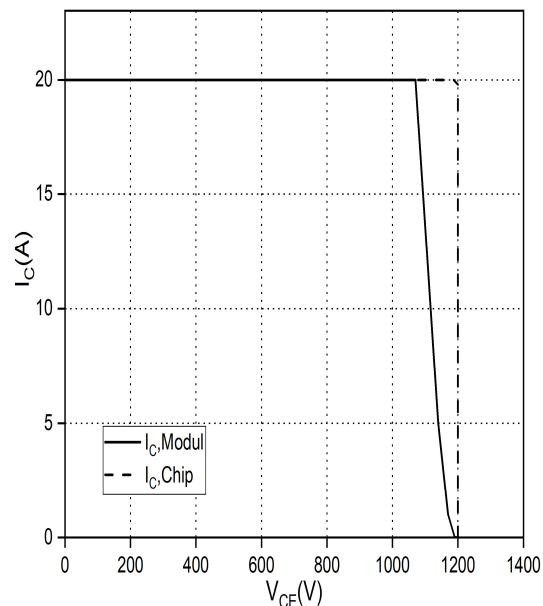

正向偏压特性二极管, 逆变器 (典型值)

forward characteristic of Diode, Inverter (typical)

$I_F = f(V_F)$

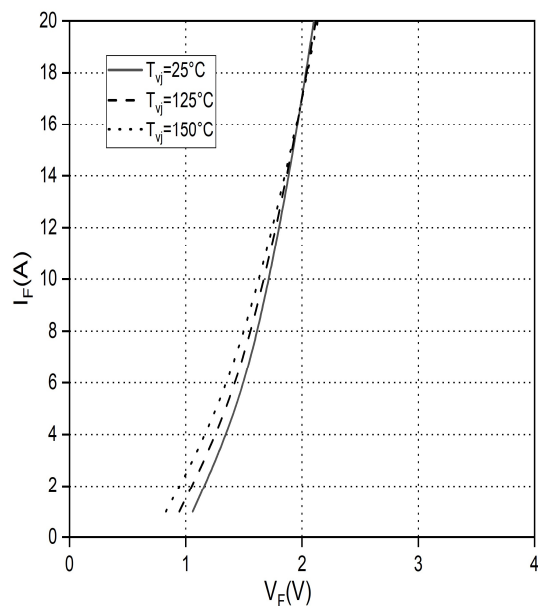


开关损耗二极管, 逆变器 开关损耗 (典型值)

Switching losses Diode, Inverter (typical)

$E_{rec} = f(I_F)$

$R_{Gon} = 30\Omega, V_{CE} = 600V$

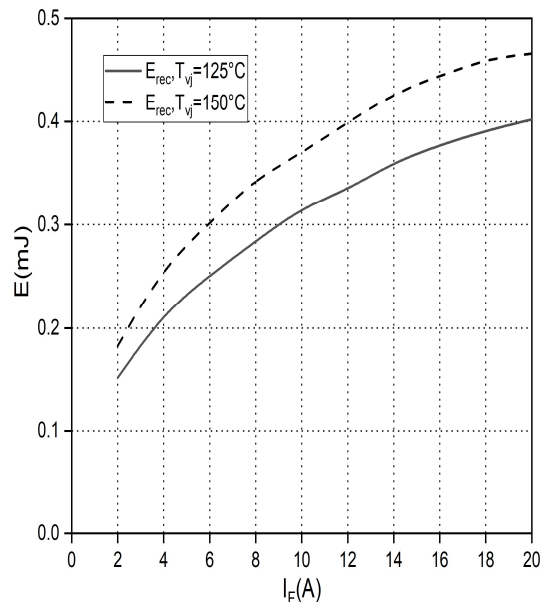


二极管, 逆变器 (典型值)

switching losses Diode, Inverter (typical)

$E_{rec} = f(R_G)$


$I_F = 10A, V_{CE} = 600V$

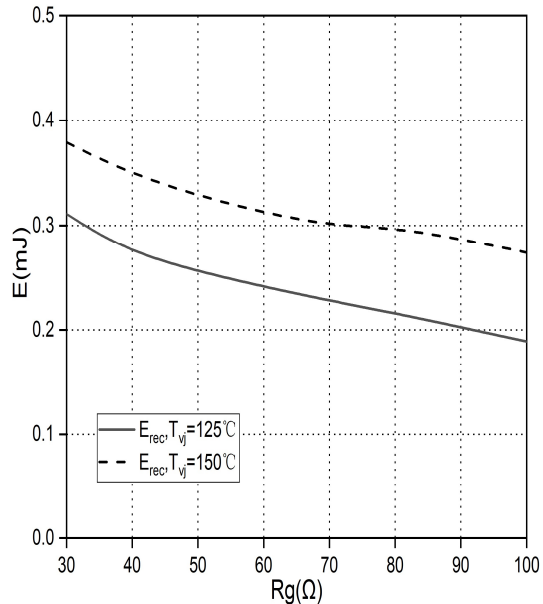

瞬态热阻抗二极管, 逆变器

transient thermal impedance Diode, Inverter


$Z_{thJC} = f(t)$

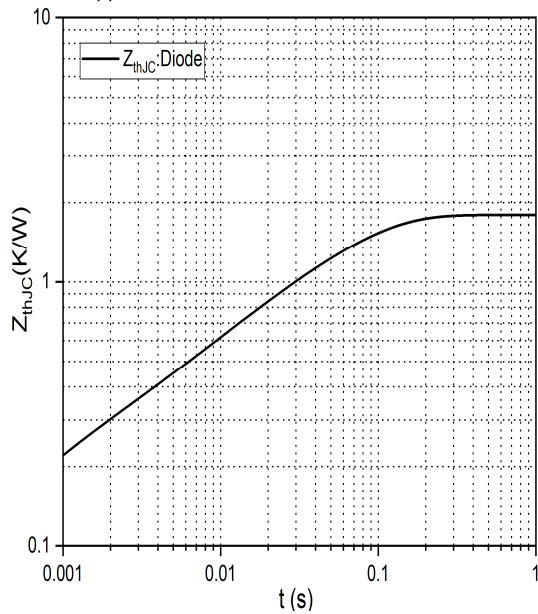

正向偏压特性 二极管, 整流器 (典型值)

forward characteristic of Diode Rectifier (typical)

$I_F = f(V_F)$

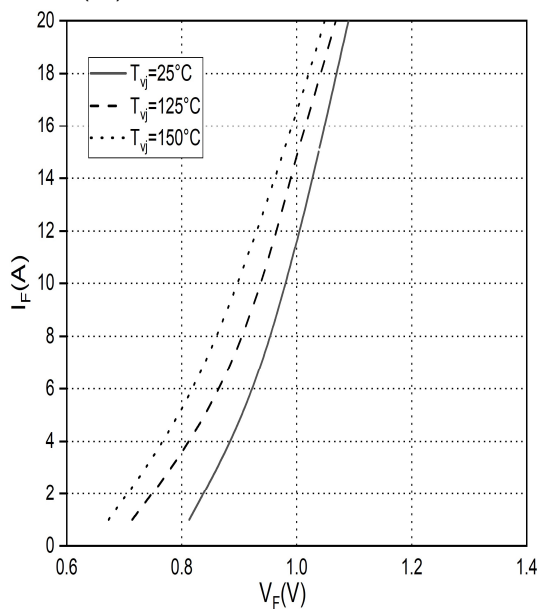


输出特性 IGBT, 制动-斩波器 (典型值)

Output characteristic IGBT, Brake-Chopper (typical)

$I_C = f(V_{CE})$


$V_{GE} = 15V$

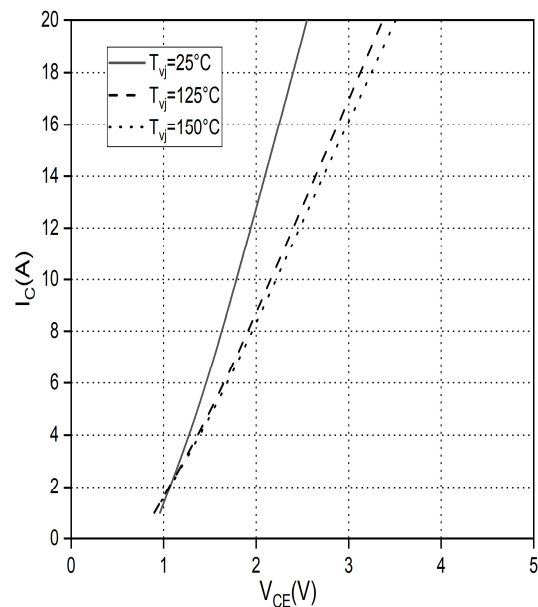

正向偏压特性 二极管, 制动-斩波器 (典型值)

forward characteristic of Diode, Brake-Chopper (typical)


$I_F = f(V_F)$

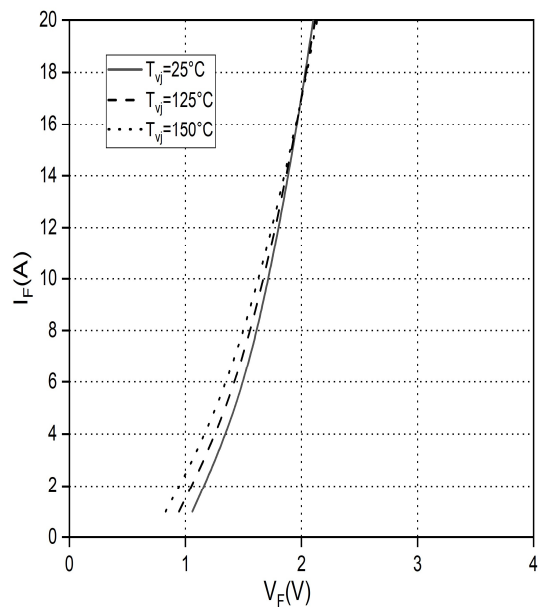


负温度系数热敏电阻 温度特性 (典型值)

NTC-Thermistor-temperature characteristic (typical)

$R = f(T)$

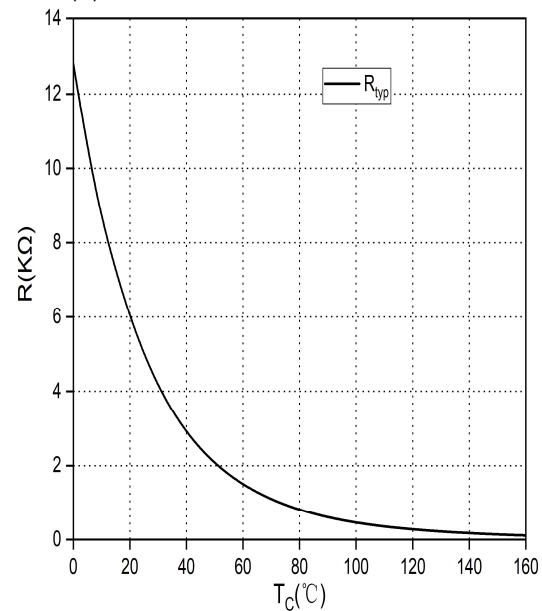

Internal Circuit:

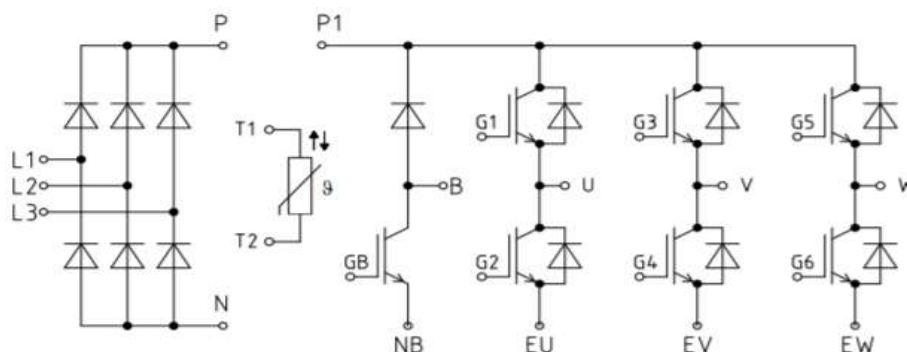

Package Dimension

Dimensions in Millimeters

